

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>C30B</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/15881</b> (43) International Publication Date: 23 March 2000 (23.03.2000)
(21) International Application Number: PCT/KR99/00541 (22) International Filing Date: 14 September 1999 (14.09.1999) (30) Priority Data: 1998/37727 14 September 1998 (14.09.1998) KR (60) Parent Application or Grant GENITECH CO., LTD. [/]; O. LEE, Kyu-Hong [/]; O. KANG, Won-Gu [/]; O. KANG, Sang-Won [/]; O. LEE, Kyu-Hong [/]; O. KANG, Won-Gu [/]; O. KANG, Sang-Won [/]; O. HUH, Jin-Seok ; O.		<b>Published</b>

(54) Title: GAS FEEDING SYSTEM FOR CHEMICAL VAPOR DEPOSITION REACTOR AND METHOD OF CONTROLLING THE SAME  
(54) Titre: SYSTEME D'ALIMENTATION EN GAZ D'UN REACTEUR DE CHIMIO-DEPOSITION ET SON PROCEDE DE COMMANDE

(57) Abstract

The present invention relates to a gas feeding system, and more particularly, to a gas feeding system for chemical vapor deposition (CVD) reactor capable of improving the uniformity and quality of deposited film in the manufacture of semiconductor devices. The present invention also relates to a method of controlling the same which prevents the waste of reactant source. The gas feeding system of the present invention preferably comprises a plurality of reactant source supply apparatuses, each being connected to the reactor to supply different reactant sources therein discontinuously or sequentially. Each reactant source supply apparatus includes a pass valve to prevent the waste of non-use reactant sources.

(57) Abrégé

L'invention porte sur un système d'alimentation en gaz, et en particulier sur un système d'alimentation en gaz pour réacteur de chimio-déposition de vapeurs (CVD) améliorant l'uniformité et la qualité du film déposé lors de la fabrication de dispositifs à semi-conducteurs. L'invention porte également sur le procédé de commande dudit système empêchant le gaspillage de la source de réactif. Le système d'alimentation en gaz comporte de préférence plusieurs appareils distributeurs de sources de réactifs raccordés au réacteur et l'alimentant en non continu ou séquentiellement. Chacun de ces distributeurs comporte un clapet de dérivation empêchant le gaspillage des sources de réactif non utilisées.

Best Available Copy

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>C30B</b>		A2	(11) International Publication Number: <b>WO 00/15881</b>
			(43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/KR99/00541		(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 14 September 1999 (14.09.99)		Published <i>Without international search report and to be republished upon receipt of that report.</i>	
(30) Priority Data: 1998/37727 14 September 1998 (14.09.98) KR			
(71) Applicant (for all designated States except US): GENTECH CO., LTD. [KR/KR]; 1694-5 Shinil-dong, Taedeok-gu, Taejeon 306-230 (KR).			
(72) Inventors; and (75) Inventors/Applicants (for US only): LEE, Kyu-Hong [KR/KR]; 105-606 Harul Apt., 160-1 Shinsung-dong, Yusong-gu, Taejeon 305-345 (KR). KANG, Won-Gu [KR/KR]; 118-908 Hanbit Apt., 99 Uheun-dong, Yusong-gu, Taejeon 305-333 (KR). KANG, Sang-Won [KR/KR]; 133-1506 Hanbit Apt., 99 Uheun-dong, Yusong-gu, Taejeon 305-333 (KR).			
(74) Agent: HUH, Jin-Seok; J.S. HUH Patent Office, 206 Sungji Building, 1338-22 Seocho-dong, Seocho-ku, Seoul 137-070 (KR).			

(54) Title: GAS FEEDING SYSTEM FOR CHEMICAL VAPOR DEPOSITION REACTOR AND METHOD OF CONTROLLING THE SAME

(57) Abstract

The present invention relates to a gas feeding system, and more particularly, to a gas feeding system for chemical vapor deposition (CVD) reactor capable of improving the uniformity and quality of deposited film in the manufacture of semiconductor devices. The present invention also relates to a method of controlling the same which prevents the waste of reactant source. The gas feeding system of the present invention preferably comprises a plurality of reactant source supply apparatuses, each being connected to the reactor to supply different reactant sources therein discontinuously or sequentially. Each reactant source supply apparatus includes a pass valve to prevent the waste of non-use reactant sources.

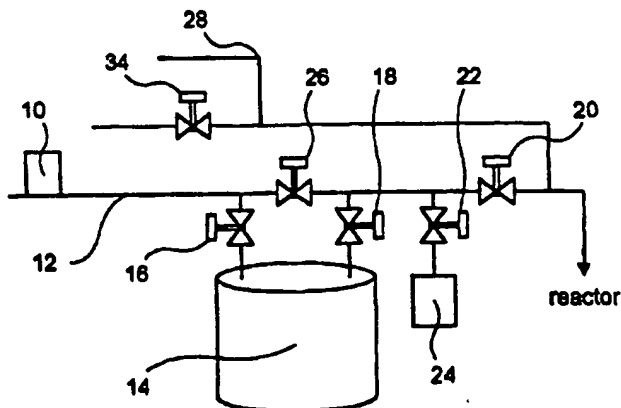

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MR	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MT	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NP	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

**5**

**10**

**15**

**20**

**25**

**30**

**35**

**40**

**45**

**50**

**55**

**GAS FEEDING SYSTEM FOR CHEMICAL VAPOR DEPOSITION  
REACTOR AND METHOD OF CONTROLLING THE SAME**

**TECHNICAL FIELD**

The present invention relates to a gas feeding system, and more particularly, to a gas feeding system for chemical vapor deposition (CVD) reactor capable of improving the uniformity and quality of deposited film in the manufacture of semiconductor devices. The present invention also relates to a method of controlling the same which prevents the waste of reactant source.

**BACKGROUND ART**

It is often desirable to form films of uniform thickness on a substrate in semiconductor manufacturing. Accordingly, considerable efforts have been made to improve both equipment and manufacturing process.

Recently, many processes for forming a high quality film were developed using surface reaction on a semiconductor substrate: processes such as using discontinuous supplies of a reactant source on a substrate, atomic layer epitaxy, and sequential supplies of a reactant sources on a substrate. The films formed by the above processes have enhanced uniformity and quality, and minimized impurity concentration therein. However, the above processes have a disadvantage of the waste of non-use and idling gaseous reactant sources.

In most conventional processes, one or more types of reactant sources were simultaneously and continuously supplied into a reactor, forming a film on a semiconductor substrate by the decomposition of reactant sources. However, such processes also have disadvantages that uniformity in film thickness, film quality, and impurity concentration are considerably affected depending upon the flow direction, flow velocity, temperature, types of used reactant sources.

**DISCLOSURE OF INVENTION**

Accordingly, it is an object of the present invention to provide a gas feeding system for chemical vapor deposition reactor and method of controlling the same capable of producing a high quality film when used for such process as using

5 discontinuous or sequential supplies of a reactant sources.

It is another object of the present invention to provide a gas feeding system for chemical vapor deposition reactor and method of controlling the same capable of  
10 preventing the waste of non-use and idling gaseous reactant sources when not feeding the sources into the reactor.

In order to accomplish the aforementioned objects, the present invention provides a gas feeding system for chemical vapor deposition reactor having at least  
15 one reactant source supply apparatus, the supply apparatus each comprising: a mass flow controller for controlling the flow rate of a carrier gas which carries a reactant  
10 source; a reservoir for containing the reactant source, the reservoir having inlet and outlet valves for controlling the flow of the carrier gas through the reservoir; a supply  
20 valve for controlling the mass flow of the reactant source carried by the carrier gas to the reactor; an evacuation valve disposed between the outlet valve and the supply  
valve, the evacuation valve evacuating the carrier gas or the reactant source toward a  
25 vacuum pump; and a pass valve disposed between the inlet valve and the outlet valve  
15 so that the carrier gas passing therethrough flows into the reactor or the evacuation valve, the pass valve stabilizing the carrier gas mass flow controller as well as  
preventing the leakage of the reactant source from the reservoir.

In the embodiment, the number of the reactant source supply apparatus can  
20 be more than one, the supply apparatuses respectively having reservoirs containing different reactant sources, each of the supply apparatuses being connected to the  
35 reactor to supply different reactant sources therein in order to deposit complex materials such as PZT, BST, or SBT.

Preferably, the reactant source supply apparatus further comprises a first  
25 purge gas supply unit disposed between the supply valve and the reactor so as to prevent the backward flow of other reactant sources into the source supply apparatus  
40 upon deposition reaction. More preferably, the first purge gas supply unit further comprises a mass flow controller for controlling the flow of purge gas therethrough to  
45 a constant level.

In addition, the reactant source supply apparatus further comprises: a second  
30 purge gas supply unit disposed between the supply valve and the reactor so as to purge the reactant source residue; and a purge valve for regulating the flow of purge  
50

5 gas therethrough.

The present invention method is applicable to the control of a gas feeding system for chemical vapor deposition reactor having at least one reactant source supply apparatus, the supply apparatus each comprising: a reservoir for containing  
10 said reactant source, the reservoir having inlet and outlet valves for controlling the flow of the carrier gas through the reservoir; an evacuation valve disposed next to the outlet valve, the evacuation valve evacuating the carrier gas and the reactant source toward a vacuum pump; and a pass valve disposed between the inlet valve and the outlet valve.

15 The control method comprises the step of shutting off the inlet and outlet valves simultaneously with opening the pass valve so that the carrier gas passing therethrough flows into the reactor or the evacuation valve without the waste of reactant source in the reservoir.

In the control method, preferably, reactant source residue is removed by  
20 flowing the carrier gas into the reactor through the open pass valve. Additionally, the carrier gas is evacuated through the evacuation valve to stabilize the reactant source supply prior to the supply of reactant source from the reservoir to the reactor.

The foregoing, and other features and advantages of the invention, will be  
25 apparent from the following, more particular, description of the preferred embodiments of the invention, the accompanying drawings and the appended claims.

### 30 BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic view of a gas feeding system in accordance with an embodiment of the present invention;

35 FIG. 2 is a schematic view of a gas feeding system, having a reactant source vaporizer, in accordance with another embodiment of the present invention; and

40 FIG. 3 is a schematic view of a gas feeding system with a plurality of reactant source supply apparatuses connected to one reactor, in accordance with another embodiment of the present invention.

45 Where considered appropriate, for brevity sake, reference numerals have been repeated among the figures to indicate corresponding elements.

## BEST MODE FOR CARRYING OUT THE INVENTION

## [Example 1]

FIG. 1 is a schematic view of a gas feeding system in accordance with an embodiment of the present invention. Referring to FIG. 1, a mass flow controller 10 for controlling the flow rate of a carrier gas to carry a reactant source is connected through a reactant source supply tube 12 to a reactor. The carrier gas is preferably an inert gas to prevent reaction with the reactant source. The reactant source in use for the film material is contained in a reactant source reservoir 14 connected to the supply tube 12. Between the supply tube 12 and reservoir 14, an inlet valve 16 and an outlet valve 18 are disposed to supply the reactant source into the reactor according to the flow of the carrier gas. In general, the reactant source contained in the reservoir 14 is a solid or liquid phase, but the reactant source should be vaporized within the reservoir 14 or on the supply tube 12 for the chemical deposition. A supply valve 20 is disposed between the outlet valve 18 and the reactor to regulate the flow of reactant source supplied into the reactor through the outlet valve 18. In most prior art techniques, the mass flow controller 10 is maintained in an "on" state for the subsequent process after the completion of reaction because it takes much time to stabilize the flow controller 10, especially when the controller 10 is "on/off" switched. Moreover, it also takes much time to stabilize the supply of the reactant source. In order to stabilize the reactant source supply by evacuating the reactant source or the carrier gas, the gas feeding system of the present invention comprises an evacuation valve 22 disposed between the outlet valve 18 and the supply valve 20. The evacuation valve 22 is connected to a vacuum pump 24. Additionally, a pass valve 26 for passing the carrier gas therethrough is disposed between the inlet valve 16 and the outlet valve 18 to prevent the waste of the reactant source.

In order to prevent the backward flow of other reactant sources into the source supply apparatus upon deposition reaction, a first purge gas supply unit 28 is disposed between the supply valve 20 and the reactor, and the first purge gas supply unit 28 comprises a mass flow controller (not shown) for controlling the flow of purge gas therethrough to a constant level. Preferably, the purge gas is an inert gas to prevent reaction with the reactant source. The purge gas may or may not be the same as the carrier gas.



5 In addition, in order to purge the reactor of the reactant source residue after the supply of the source and before the the supply of another reactant source, a second  
10 purge gas supply unit for supplying large amount of purge gas is connected to the first  
purge gas supply unit 28. The second purge gas supply unit comprises a purge valve  
5 34 for regulating the flow of purge gas therethrough.

The operation of the above gas supply system will now be described.

15 The operation can be divided into several sequential steps such as supply of  
reactant source, removal of the reactant source residue, standby for reactant source  
supply, and stabilization of the reactant source supply.

20 In the step of reactant source supply, the carrier gas passed through the mass  
flow controller 10 is introduced into the reactant source reservoir 14 through the inlet  
valve 16. Then, the carrier gas flows via the reactant source supply tube 12 and the  
outlet valve 18. The amount of reactant source supply can be controlled by both the  
25 flow rate of carrier gas and the temperature of reservoir 14. Thereafter, the reactant  
15 source is injected into the reactor through the supply valve 20, contributing film  
formation. In this step, the pass valve 26, both of the evacuation valve 22 and the  
purge valve 34 are shut off, and a small amount of purge gas is continuously supplied  
30 by the first purge gas supply unit 28 to prevent the backward flow of other reactant  
sources from the reactor.

20 In the next step the reactant source residue is removed from the reactor and  
the reactant source supply tube 12. Following two methods can be adopted to remove  
35 the reactant source residue.

In the first method, the purge valve 34 opens to purge the reactant source  
residue.

40 In the second method, both of the pass valve 26 and the supply valve 22 are  
25 open and the evacuation valve 22 is closed to deliver a sufficient amount of carrier  
gas to the reactor to purge the reactant source residue. In this step, both of the inlet  
valve 16 and the outlet valve 18 are all shut off to prevent the waste of the reactant  
45 source within the reservoir 14.

30 The step of standby for reactant source supply can be controlled by the  
following two methods.

In the first method applicable to a long standby time, all valves such as the

5 inlet valve 16, the outlet valve 18, the supply valve 20, the pass valve 26 and the evacuation valve 22 as well as the mass flow controller 10 are shut off.

10 In the second method applicable to a short standby time, the carrier gas is directly evacuated to the vacuum pump 24 via both the pass valve 26 and the evacuation valve 22 while the inlet valve 16, the outlet valve 18 and the supply valve 20 are all closed.

15 The supply stabilization step of the reactant source differently proceeds depending upon the standby steps for reactant source supply.

20 If all valves are closed in the stabilization step of the reactant source, the pass valve 26 and the evacuation valve 22 are first opened to stabilize the mass flow controller 10, and then, the inlet and outlet valves 16 and 18 are opened with the closing of the pass valve 26 to stabilize the reactant source supply.

25 If the mass flow controller 10 is already held at a stabilized state in the standby step for reactant source supply, both the inlet and outlet valves 16 and 18 open with the closing of the pass valve 26 to stabilize the reactant source supply. This second stabilization step may or may not necessary depending upon an application.

30 [Example 2]

35 FIG. 2 is a schematic view of a gas feeding system, having a reactant source vaporizer, in accordance with another embodiment of the present invention. Referring to FIG. 2, the different between the example 1 and the example 2 is that a vaporizer 36 for vaporizing the reactant source is disposed between the reactant source supply tube 12 and the reactant source reservoir 14. Moreover, a minute flow pump 38 is disposed between the reservoir 14 and the vaporizer 36 for the effective control of reactant source supply and its vaporization. The vaporizer 36 vaporizes the reactant source in liquid phase contained in the reservoir 14 beforehand to supply the reactant source into the reactor. The operation of other parts of the gas feeding system is the same as that of the example 1.

45 [Example 3]

50 FIG. 3 is a schematic view of a gas feeding system with a plurality of reactant source supply apparatuses connected to one reactor, in accordance with

5 another embodiment of the present invention. Referring to FIG. 3, two reactant source  
supply apparatuses B and C, each being the same as described in the example 1, are  
connected to one reactor. Additionally, a reactive gas supply apparatus A is connected  
10 to the reactor via a reactive gas supply tube 40. The flow of gas A to the reactor is  
regulated by a supply valve 20 disposed on the reactive gas supply tube 40. An  
5 evacuation valve for evacuating the gas A is indicated with reference numeral 22.

15 As is the same as the examples 1 and 2, each supply apparatus comprises a  
first purge gas supply unit 28 and a mass flow controller (not shown) for the purge  
gas to prevent the backward flow of other reactant sources from the reactor upon  
10 deposition reaction. Additionally, each supply apparatus comprises a second purge  
gas supply unit for providing a sufficient amount of purge gas to purge the reactant  
20 source residue, and a purge valve 34 therefor.

Referring again to FIG. 3, an example of forming "BACA" layers repeatedly  
25 to a desired thickness will be described. The "BACA" unit layer can be formed by  
reacting the gas A with a thin layer containing the B component and then depositing a  
15 C component thin layer thereon. Hereinafter, "A" represents the gas supply apparatus  
A, "B" represents the reactant source supply apparatus B, and "C" represents the  
30 reactant source supply apparatus C.

The carrier gas passed through the mass flow controller 10 of "B" is  
20 introduced to the reactant source reservoir 14' via the inlet valve 16, and then,  
delivered to the reactant source supply tube 12 via the outlet valve 18. The reactant  
35 source B introduced into the reactor. All of the first purge gas supply units 28  
respectively flow small amounts of purge gases through the reactor to prevent the  
backward flow of the reactant source B into "A" and "C" from the reactor. At that  
25 time, "A" and "C" are held at standby state for reactant source supply as described in  
the example 1. Hereinafter, any gas which will not be described in each process step  
40 is held at standby state for reactant source supply.

45 After the formation of a thin layer B, the reactant source B residue within the  
reactor and the reactant source supply tube 12 is removed by the removal method  
described in the example 1. In the meantime, the gas A is held at a stabilization state.  
30 Thereafter, the gas A is introduced to the reactor to react with the thin layer B.

50 After the reaction between the gas A and the thin layer B, the gas A residue

5 within the reactor and the reactant source supply tube 12 is removed by the method described in the example 1. In the meantime, the reactant source C is held at stabilization or standby state. Thereafter, the reactant source C is introduced to the reactor to form a thin layer C.

10 After the formation of the thin layer C, the reactant source C residue within the reactor and the reactant source supply tube 12 is removed by the method described in the example 1. In the meantime, the gas A is held at stabilization state. Thereafter, the gas A is introduced to the reactor to react with the thin layer C.

15 After the reaction between the gas A and the thin layer C, the gas A residue within the reactor and the reactant source supply tube 12 is removed by the method described in the example 1. In the meantime, the reactant source B is held at stabilization or standby state. Thereafter, the reactant source C is introduced to the reactor to form a thin layer C.

20 The above process steps of forming a thin layer and removal of residue are repeated to form a film comprised of sequentially deposited "BACA" layers.

25 In the exemplary embodiments of the present invention, the pass valve 26 is used to stabilize the mass flow controller, which significantly reduces the consumption of reactant sources. Moreover, the carrier gas passed through the mass flow controller 10 can be used to purge the reactant sources instead of the purge gas.

30 As another application of the present invention, a film can be formed by supplying reactant sources discontinuously as follows. For example, the reactant source B and the gas A are first simultaneously introduced to the reactor and then removed for a predetermined period of time. Next, the reactant source C and the gas A are simultaneously introduced to the reactor and then removed for a predetermined period of time. The above two process steps are sequentially repeated to form a film of a desired thickness.

## Claims

5

10

15

20

25

30

35

40

45

50

55

## WHAT IS CLAIMED IS :

1. A gas feeding system for chemical vapor deposition reactor having at least one reactant source supply apparatus, said supply apparatus each comprising:
  - a mass flow controller for controlling the flow rate of a carrier gas which carries a reactant source;
  - a reservoir for containing said reactant source, said reservoir having inlet and outlet valves for controlling the flow of said carrier gas through said reservoir;
  - a supply valve for controlling the mass flow of said reactant source carried by said carrier gas to said reactor;
  - an evacuation valve disposed between said outlet valve and said supply valve, said evacuation valve evacuating said carrier gas or said reactant source toward a vacuum pump; and
  - a pass valve disposed between said inlet valve and said outlet valve so that the carrier gas passing therethrough flows into said reactor or said evacuation valve, said pass valve stabilizing said carrier gas mass flow controller as well as preventing the leakage of said reactant source from said reservoir.
2. The gas feeding system of claim 1, wherein the number of said reactant source supply apparatus is at least two, said supply apparatuses respectively having reservoirs containing different reactant sources, each of said supply apparatuses being connected to said reactor to supply different reactant sources therein.
3. The gas feeding system of claim 1, further comprising a first purge gas supply unit disposed between said supply valve and said reactor so as to prevent the backward flow of other reactant sources into the gas feeding system upon deposition reaction.
4. The gas feeding system of claim 3, wherein said first purge gas supply unit further comprises a mass flow controller for controlling the flow of purge gas therethrough to a constant level.
5. The gas feeding system of claim 1, further comprising:



5 a second purge gas supply unit disposed between said supply valve and said reactor  
so as to purge the reactant source residue; and  
10 a purge valve for regulating the flow of purge gas therethrough.

5 6. The gas feeding system of claim 3, further comprising:  
a second purge gas supply unit disposed between said supply valve and said reactor  
so as to purge the reactant source residue; and  
15 a purge valve for regulating the flow of purge gas therethrough.


10 7. A method of controlling a gas feeding system for chemical vapor deposition reactor  
having at least one reactant source supply apparatus, said supply apparatus each  
20 comprising: a reservoir for containing said reactant source, said reservoir having inlet  
and outlet valves for controlling the flow of said carrier gas through said reservoir, an  
evacuation valve disposed next to said outlet valve, said evacuation valve evacuating  
25 said carrier gas and said reactant source toward a vacuum pump; and a pass valve  
15 disposed between said inlet valve and said outlet valve, the controlling method  
comprising the step of shutting off said inlet and outlet valves simultaneously with  
opening said pass valve so that the carrier gas passing therethrough flows into said  
30 reactor or said evacuation valve without the waste of reactant source in said reservoir.

20 8. The method of claim 7, wherein reactant source residue is removed by flowing said  
35 carrier gas into said reactor through the open pass valve.

40 9. The method of claim 7, wherein, prior to the supply of reactant source from said  
25 reservoir to said reactor, said carrier gas is evacuated through said evacuation valve to  
stabilize said reactant source supply.

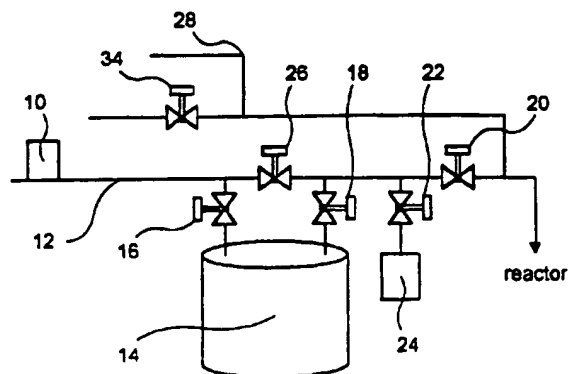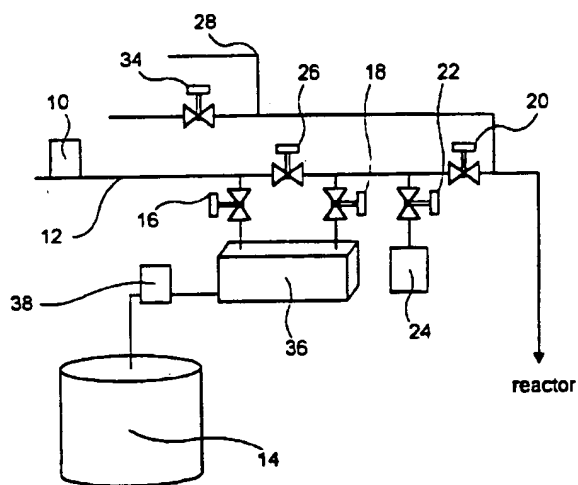**FIG. 1****FIG. 2**

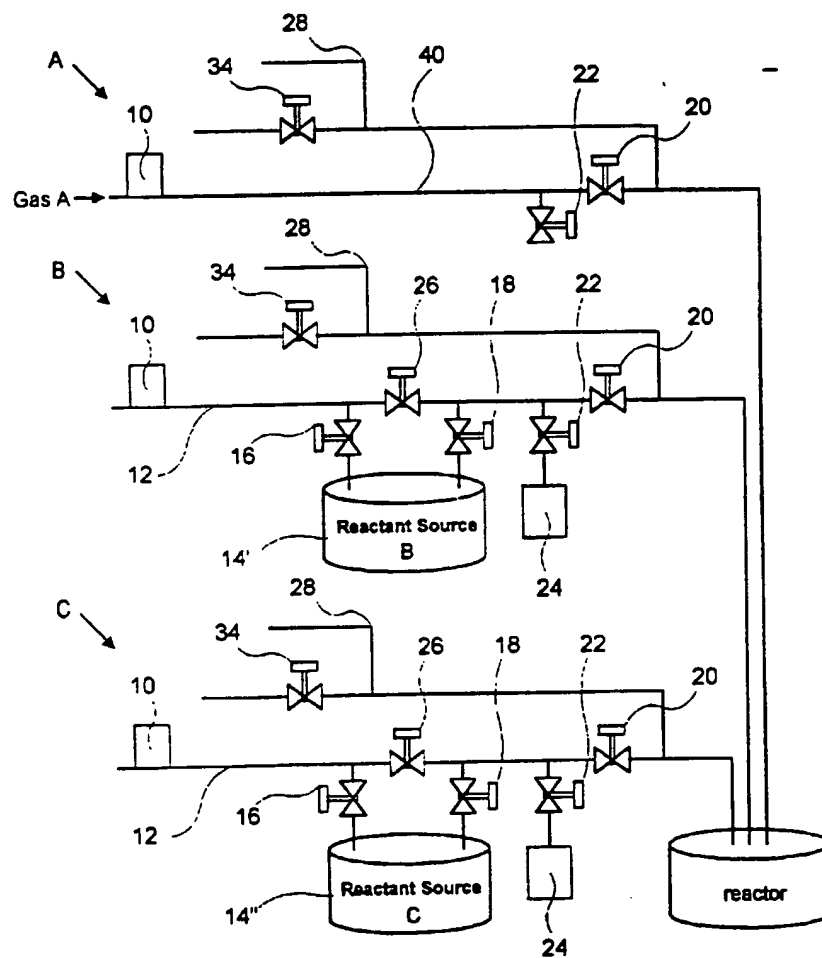

**FIG. 3**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>C23C 16/52</b>	<b>A3</b>	(11) International Publication Number: <b>WO 00/15881</b> (43) International Publication Date: 23 March 2000 (23.03.2000)		
(21) International Application Number: <b>PCT/KR99/00541</b> (22) International Filing Date: <b>14 September 1999 (14.09.1999)</b> (30) Priority Data: <b>1998/37727 14 September 1998 (14.09.1998) KR</b> (60) Parent Application or Grant <b>GENTECH CO., LTD. [/]; O. LEE, Kyu-Hong [/]; O. KANG, Won-Gu [/]; O. KANG, Sang-Won [/]; O. LEE, Kyu-Hong [/]; O. KANG, Won-Gu [/]; O. KANG, Sang-Won [/]; O. HUH, Jin-Seok ; O.</b>	<b>Published</b>			
(54) Title: <b>GAS FEEDING SYSTEM FOR CHEMICAL VAPOR DEPOSITION REACTOR AND METHOD OF CONTROLLING THE SAME</b> (54) Titre: <b>SYSTEME D'ALIMENTATION EN GAZ D'UN REACTEUR DE CHIMIO-DEPOSITION ET SON PROCEDE DE COMMANDE</b>				
(57) Abstract <p>The present invention relates to a gas feeding system, and more particularly, to a gas feeding system for chemical vapor deposition (CVD) reactor capable of improving the uniformity and quality of deposited film in the manufacture of semiconductor devices. The present invention also relates to a method of controlling the same which prevents the waste of reactant source. The gas feeding system of the present invention preferably comprises a plurality of reactant source supply apparatuses, each being connected to the reactor to supply different reactant sources therein discontinuously or sequentially. Each reactant source supply apparatus includes a pass valve to prevent the waste of non-use reactant sources.</p> (57) Abrégé <p>L'invention porte sur un système d'alimentation en gaz, et en particulier sur un système d'alimentation en gaz pour réacteur de chimio-déposition de vapeurs (CVD) améliorant l'uniformité et la qualité du film déposé lors de la fabrication de dispositifs à semi-conducteurs. L'invention porte également sur le procédé de commande dudit système empêchant le gaspillage de la source de réactif. Le système d'alimentation en gaz comporte de préférence plusieurs appareils distributeurs de sources de réactifs raccordés au réacteur et l'alimentant en non continu ou séquentiellement. Chacun de ces distributeurs comporte un clapet de dérivation empêchant le gaspillage des sources de réactif non utilisées.</p>				

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: <b>C23C 16/52</b>		A3	(11) International Publication Number: <b>WO 00/15881</b>
			(43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/KR99/00541		(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 14 September 1999 (14.09.99)		Published With international search report.	
(30) Priority Data: 1998/37727 14 September 1998 (14.09.98) KR		(88) Date of publication of the international search report: 8 June 2000 (08.06.00)	
(71) Applicant (for all designated States except US): GENTECH CO., LTD. [KR/KR]; 1694-5 Shinil-dong, Taedeok-gu, Taejeon 306-230 (KR).			
(72) Inventors; and (75) Inventors/Applicants (for US only): LEE, Kyu-Hong [KR/KR]; 105-606 Hanul Apt., 160-1 Shinsung-dong, Yusong-gu, Taejeon 305-345 (KR). KANG, Won-Gu [KR/KR]; 118-908 Hanbit Apt., 99 Uheun-dong, Yusong-gu, Taejeon 305-333 (KR). KANG, Sang-Won [KR/KR]; 133-1506 Hanbit Apt., 99 Uheun-dong, Yusong-gu, Taejeon 305-333 (KR).			
(74) Agent: HUH, Jin-Saok; J.S. HUH Patent Office, 206 Sungil Building, 1338-22 Seocho-dong, Seocho-ku, Seoul 137-070 (KR).			

(54) Title: GAS FEEDING SYSTEM FOR CHEMICAL VAPOR DEPOSITION REACTOR AND METHOD OF CONTROLLING THE SAME

(57) Abstract

The present invention relates to a gas feeding system, and more particularly, to a gas feeding system for chemical vapor deposition (CVD) reactor capable of improving the uniformity and quality of deposited film in the manufacture of semiconductor devices. The present invention also relates to a method of controlling the same which prevents the waste of reactant source. The gas feeding system of the present invention preferably comprises a plurality of reactant source supply apparatuses, each being connected to the reactor to supply different reactant sources therein discontinuously or sequentially. Each reactant source supply apparatus includes a pass valve to prevent the waste of non-use reactant sources.

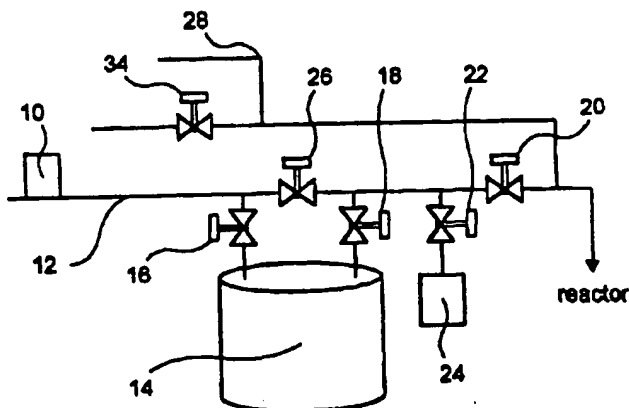

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Cote d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00541

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: C 23 C 16/52

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: C 23 C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DERWENT-WPI, EPO-PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 04-352326 A (TOKYO ELECTRON LTD., et al.) 07 December 1992 (07.12.92) (abstract). [online] [retrieved on 11 February 2000 (11.02.00)]. Retrieved from: EPO PAJ-Database.	1-9
A	JP 60-244332 A (SHARP KK, et al.) 04 December 1985 (04.12.85) (abstract). [online] [retrieved on 11 February 2000 (11.02.00)]. Retrieved from: EPO PAJ-Database.	1-9

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„A“ document member of the same patent family

Date of the actual completion of the international search

11 February 2000 (11.02.00)

Date of mailing of the international search report

08 March 2000 (08.03.00)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Beck

Telephone No. 1/53424/134

Form PCT/ISA/210 (second sheet) (July 1998)

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/KR 99/00541**

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
J9	A2	4352326	07-12-1992	none	
J9	A2	60244332	04-12-1995	none	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**